


WIRING DIAGRAM FOR 120D10 RELAY

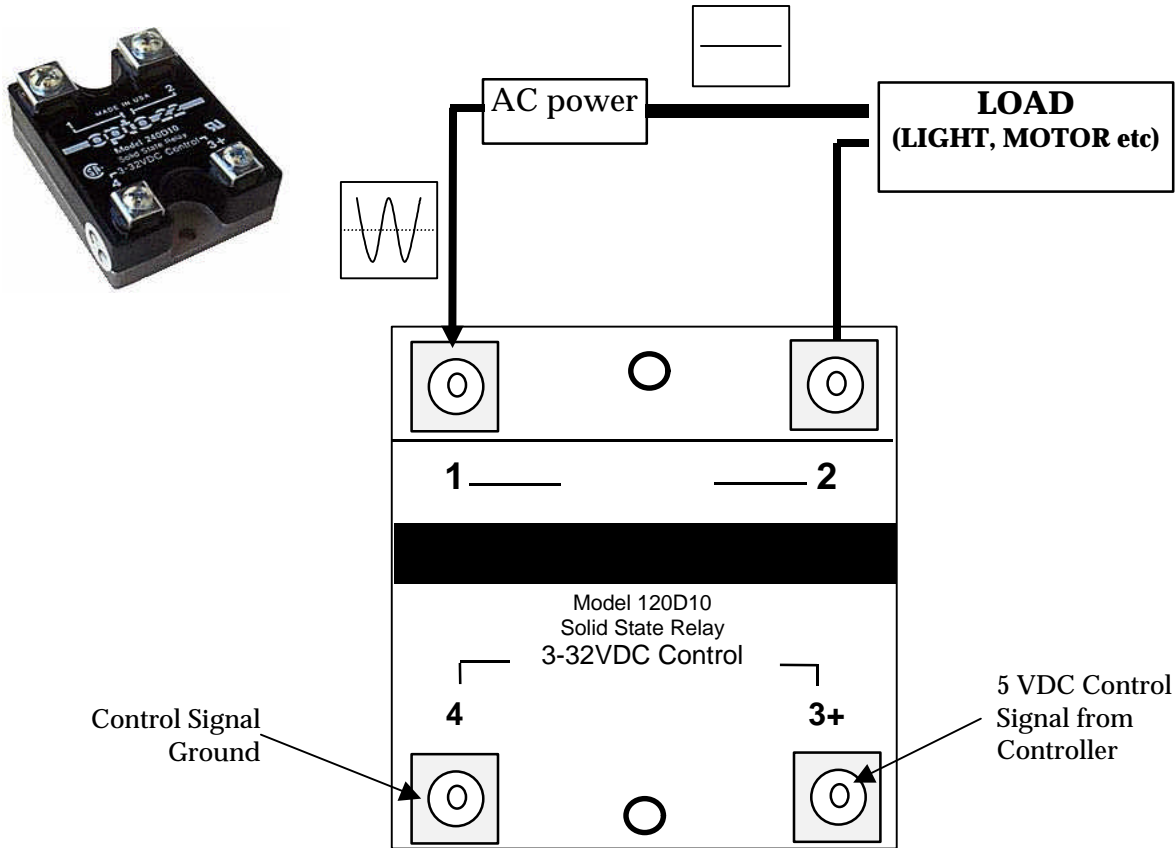

General Specifications for 120D10 Relay

Maximum Load (RMS)	10 AMPS
Line AC	25-65 (47-63Hz)
Isolation	4000 volt isolation
	Coupling capacitance input to output 8 PF max.
Operating Temperature	-40 to 100 C
Turn-On Time	½ cycle maximum zero voltage
Turn-Off Time	½ cycle maximum zero current
UL recognized and CSA certified	
Dimensions (HxWxD)	.93" x 1.75" x 2.25"

Information compiled from product specification sheet.

For more information contact: Technovision / sales@technovision.com / www.technovision.com